

VISIT SITE NOW >>

Self-Priming Excavator Pump Attachment 12-inch (SPE-12000)

MODEL #	
SPE-12000	

OPERATING LEVELS	
Min Flow	1800 GPM
Max Flow	7000 GPM
Head Range	7000 GPM
Discharge Size	12 inch
Suction Size	14 inch
Solids Handling	Solids up to 11 inch
Max Speed	1800 RPM
Percent Solids	Up to 40-70% Solids
CU YD Material HR	500-600

RECOMMENDED SENSORS	
Wireless Doppler Flow Meter	
RTK/GPS System for precision real-time dredging	



*Typical Deployment Photo. Dredge pumps can be deployed vertically or horizontally. Photos for general guidance. Contact us for further details.

REQUIRED EQUIPMENT TO OPERATE ATTACHMENTS
Cutterhead from excavator auxiliary power or from hydraulic power unit 25-35 GPM at 4250 psi
12-inch DAE Slurry hose

OPTIONAL EQUIPMENT TO ENHANCE OPERATION OF DREDGE
Wireless Doppler Flow Meter
RTK/GPS System for precision real-time dredging

GENERAL SPECS		
Overall Weight (without optional equipment)	4,000 lbs	1814.37 kg


We pump up to 70% solids, not water.

VISIT SITE NOW >>

PUMP CURVE

A pump curve is a graphical representation of a pumps ability to produce flow against a certain head. The science is matching a curve that is accurate for your project, leading to the proper pump selection and best efficiency. **EDDY Pumps** are primarily used for high solids, slurry, sludge, and dewatering.

EDDY Pump - Self-Priming Excavator Pump Attachment - 12 inch (SPE-12000) - Pump Curve

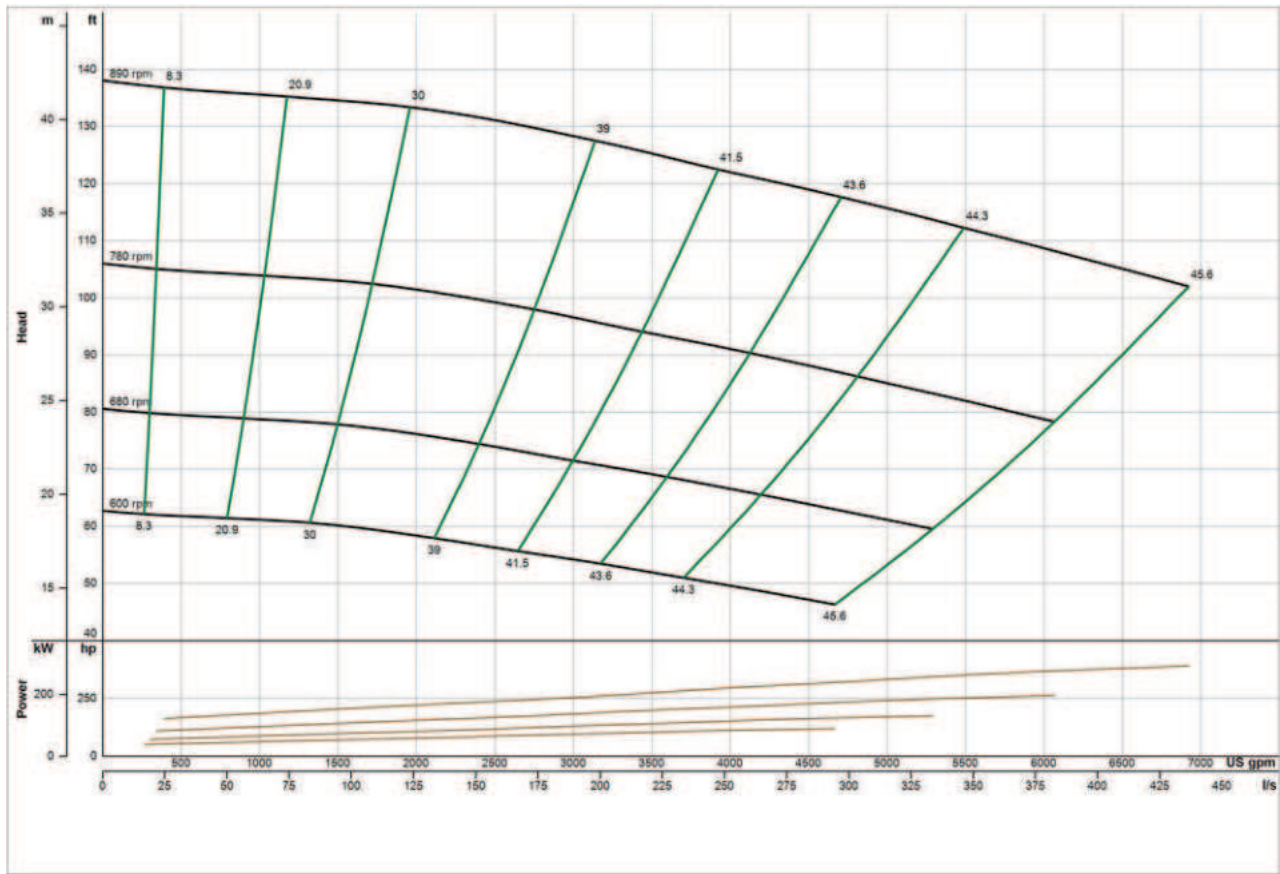

*General pump curve based on water with 900 RPM motor. Contact us with your specific material for a custom pump curve.

CONTACT US



(619) 258-7020



info@EddyPump.com